




## TECHNICAL DATA

GENERAL		D 350 AHG
Unloading system	-	Rotating
Load capacity	kg	3500
Chassis	-	Articulated and oscillating
Water hopper capacity	l	1020
Level hopper capacity	l	1790
Heaped hopper capacity	l	2130
Empty weight	kg	2780
Transmission	-	Hydrostatic
<b>ENGINE</b>		
Brand	-	KUBOTA
Model	-	D1803-CR-T-E5B
Power	kW	32.8
Operating speed	rpm	2400
Torque	N·m@rpm	150,5@1500
No. of cylinders	-	3
Emissions	-	Stage V - EPA Tier4f
Injection	-	Common Rail and electronic management
Exhaust aftertreatment	-	DPF (Diesel particulate filter)
Noise	dB(A)	101
<b>DRIVING</b>		
Max. speed	km/h	19
Maximum gradient	%	54
External turning radius	mm	4515
Traction	-	4x4
Tyres	-	11.5/80-15.3
<b>HYDRAULIC SYSTEM</b>		
Hydraulic circuit	-	12 cc gear pump
Flow rate	l/min	31,2
Working pressure	bar	170
<b>TANK CAPACITY</b>		
Fuel	l	44
Hydraulic system	l	40
<b>BRAKES</b>		
Service	-	Sealed brakes with multiple discs in oil. Hydraulic drive
Parking	-	Sealed brakes with multiple discs in oil. Mechanical drive

## DIMENSIONS

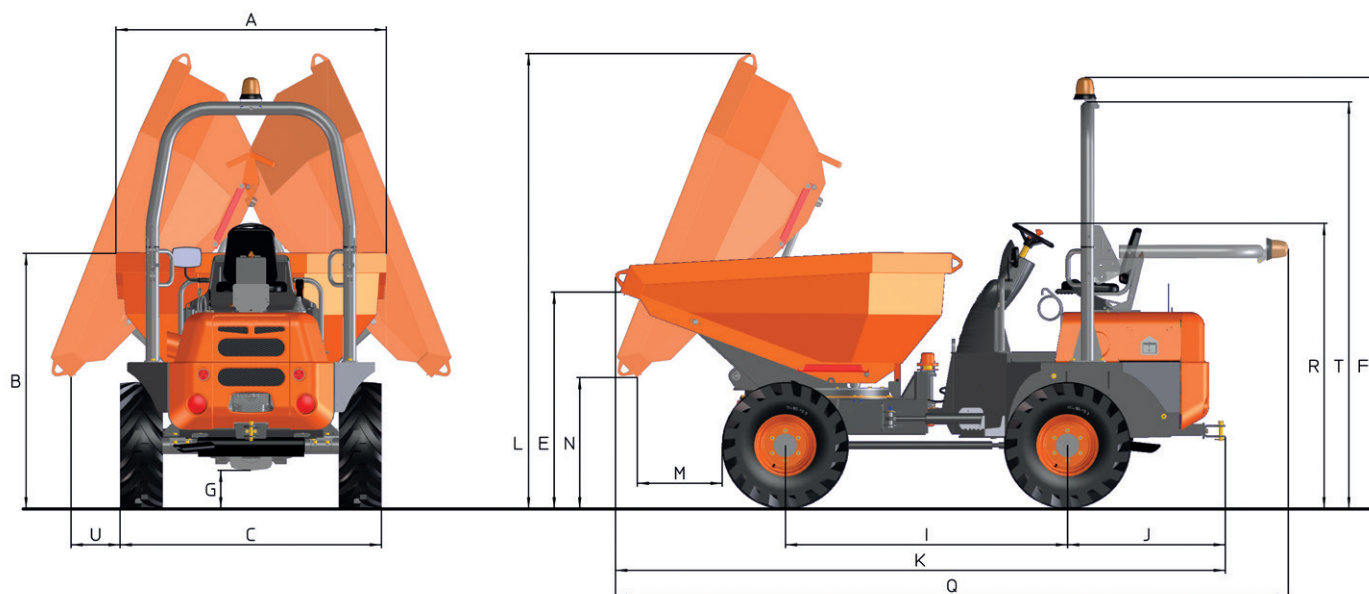

DIMENSIONS (mm)	D 350 AHG
A	1852
B	1730
C	1845
E	1435
F	2930
G	255
I	1960
J	1040
K	4180
L	3085
M	565
N	920
Q	4605
R	1930
T	2765
U	320



[www.ausa.com](http://www.ausa.com)

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

AUSA's logo and corporate identity are property of the Company, they cannot be used without authorization.